
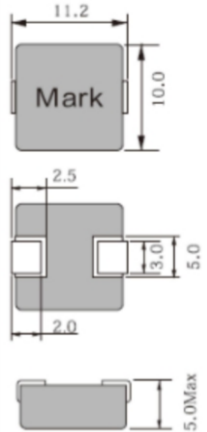


YCM1050—Series

实物图	推荐焊盘	尺寸图 (Unit:mm)
		
命名方式		
YCM 1050 — R22 M 1 2 3 4	1.YCM产品系列型号 2.产品尺寸: (10.0×5.0mm) 3.电感值: R36: 0.36μH 101: 100μH 4.感值公差: M: ±20% M: ±30%	

特性参数: YCM1050

Part Number 型号	Inductance value 电感量 @1000KHz, 1V(μ H)	DC Resistance 直流电阻(mΩ)		Heat retig Current 温升电流(A)	Saturation Current 饱和电流(A)
		典型值 Typical	最大值 Max		
YCM1050-R22M	0.22	0.57	0.8	30	55
YCM1050-R68M	0.68	2.1	3.0	20	40
YCM1050-1R0M	1.0	2.7	3.2	22	32
YCM1050-2R2M	2.2	6.6	8.5	10	18
YCM1050-3R3M	3.3	10.6	13.3	8	16
YCM1050-4R7M	4.7	13.8	18	8	14
YCM1050-5R2M	5.2	16	21	7.5	14
YCM1050-6R8M	6.8	18.3	23	6.5	12
YCM1050-100M	10	19.3	25	6	11
YCM1050-150M	15	39	50	5	8
YCM1050-220M	22	55	68	4	7
YCM1050-330M	33	77	92	3	5.5
YCM1050-470M	47	160	195	3	5
YCM1050-680M	68	240	288	3	4.5
YCM1050-101M	100	320	384	2	3

典型电流重叠与温升特性曲线:

YCM 1050-220M

— INDUCTANCE (uH)
— TEMP RISE(°C)

